

FIG. 1


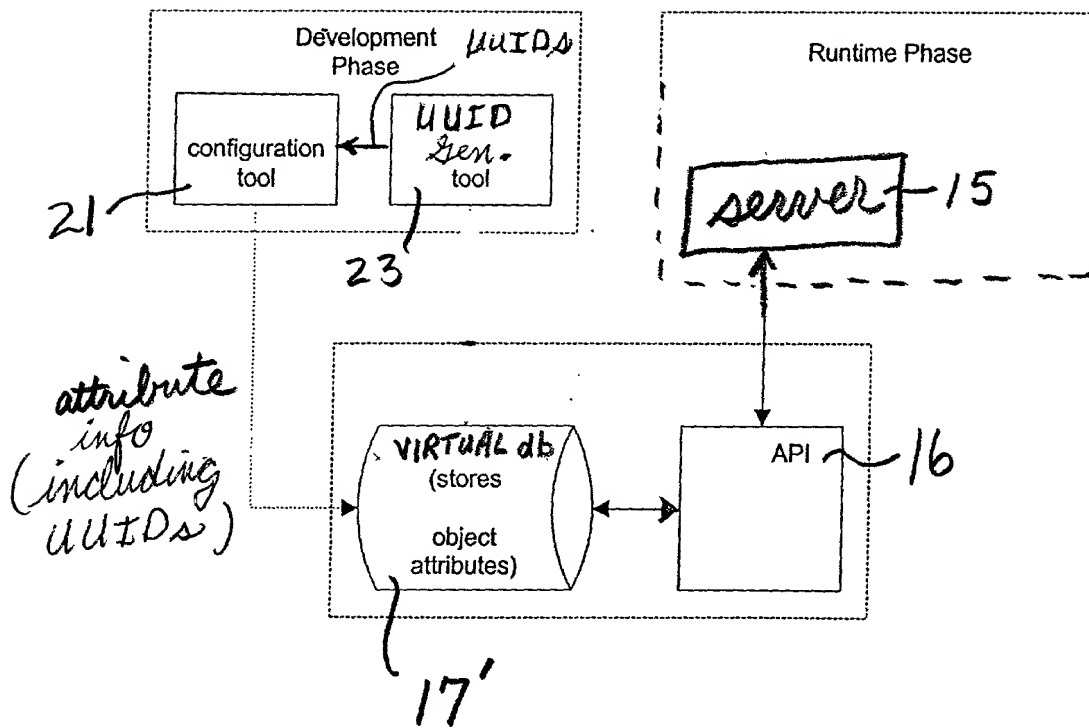


FIG. 2

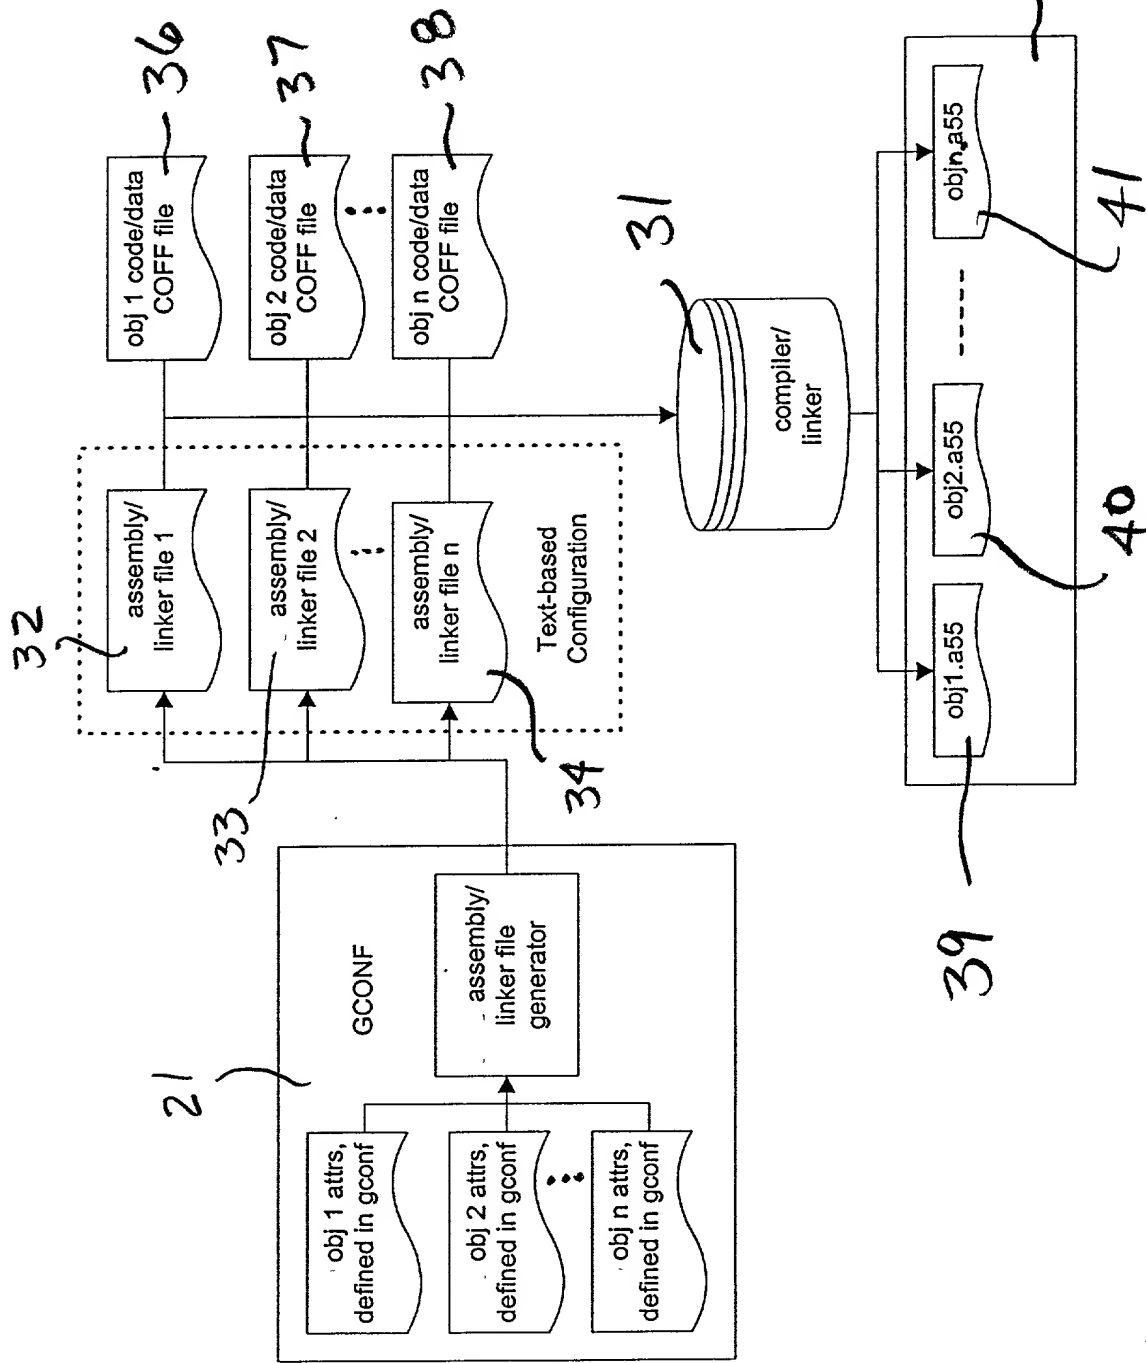

Node Attribute Field	Field Value
<i>The name of a specific node attribute</i>	<i>The value of the node attribute</i>
Example:	
Name	"codec"
UUID	"1CE5D975-4E11-11d4-A755-00C04F0C04F8"
Priority Level	15
Number of Channels	4
Buffers per Channel	2
Node Size	2048
Create Function	codecCreate
Execute Function	codecExecute
Delete Function	codecDelete
.....	.....

FIG. 4

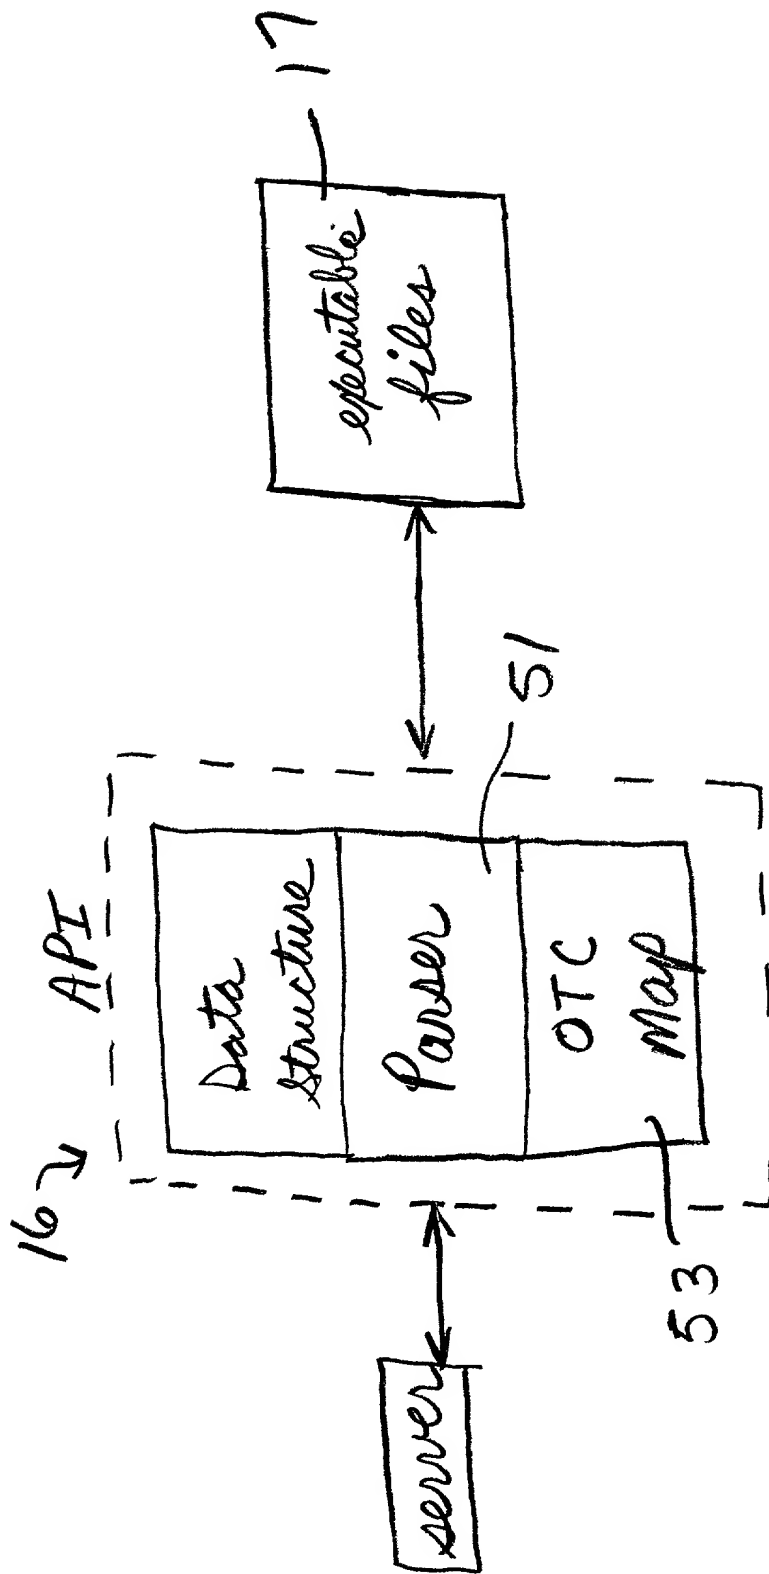


FIG. 5

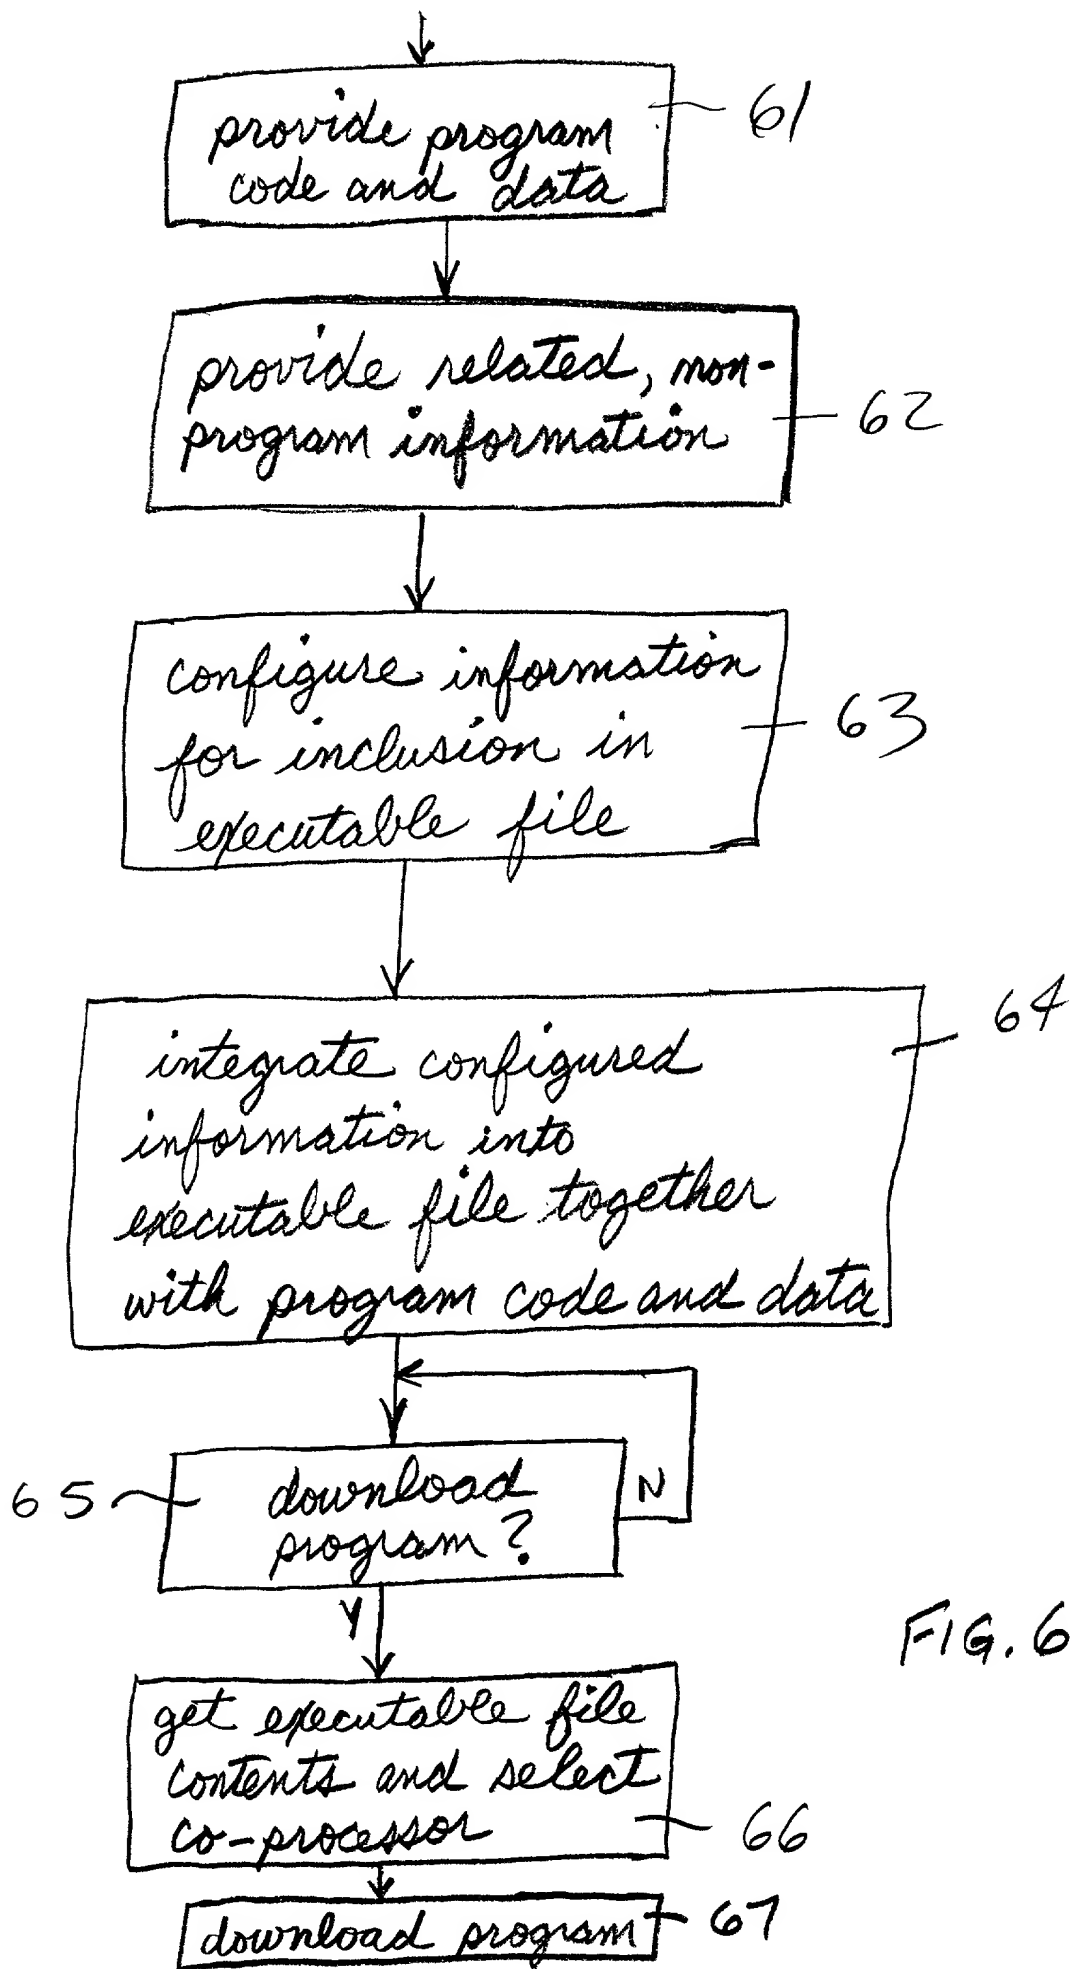


FIG. 6

program code	program data
non-program information e.g.: <ul style="list-style-type: none"> <li>- platform req. info</li> <li>- UUID</li> <li>- program memory requirements</li> </ul>	

← 40

FIG. 7

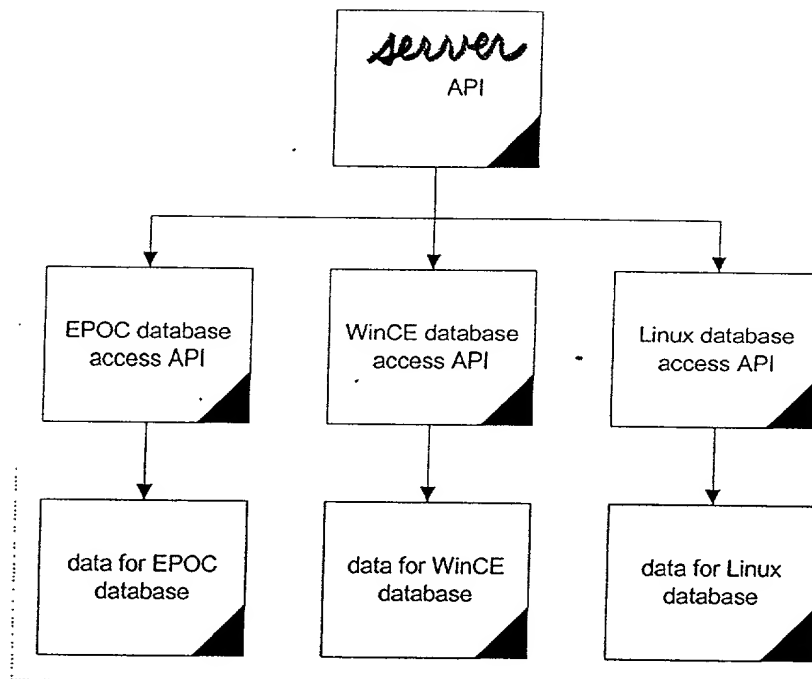


FIG. 8